














GRABO SOUND



High performance product with excellent technical parameters in elegant designs. This floor has outstanding sound insulation properties and high wear resistance. It is recommended for everybody who likes quiet and comfortable living spaces.

GRABO HABITAT SOUND



Technical parameters	Units	Standards	
 Thickness	mm	EN ISO 24346	3,60
 Wear layer	mm	EN ISO 24340	0,40
 Dimensional stability	%	EN ISO 23999	±0,30
 Classification	class	EN ISO 10874	32/41
 Width of rolls	m	EN ISO 24341	2/4
 Length of rolls	lm	EN ISO 24341	18-23
 Total weight	kg/m ²	EN ISO 23997	2,70
 Residual indentation	max. mm	EN ISO 24343	0,20
 Fire resistance		EN 13501-1	Bfl-s1
 Impact sound reduction	DLw (dB)	EN ISO 717-2	20
 Light fastness	grade	EN 20105-B02	6
 Slip resistance	class	EN 13893	DS
 Warranty	year		5



GRABO SOUND

GRABO HABITAT SOUND



4259-476

| 2m | 4m |



4259-503

| 2m | 4m |



4259-504

| 2m | 4m |



4259-501

| 2m | 4m |





4304-468 | 2m | 4m |



4304-454 | 2m | 4m |



4304-453 | 2m | 4m |



4304-455 | 2m | 4m |



GRABO SOUND

GRABO HABITAT SOUND



4547-514

| 2m | 4m |




4313-477

| 2m | 4m |



4292-456

| 2m | 4m |

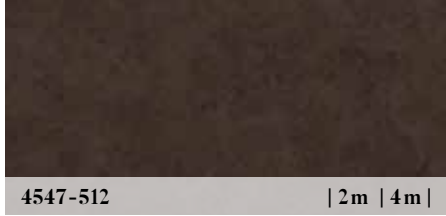

4547-512

| 2m | 4m |



4547-513

| 2m | 4m |



4313-451

| 2m | 4m |



4547-506

| 2m | 4m |



4547-515

| 2m | 4m |




4313-456

| 2m | 4m |



4313-457

| 2m | 4m |

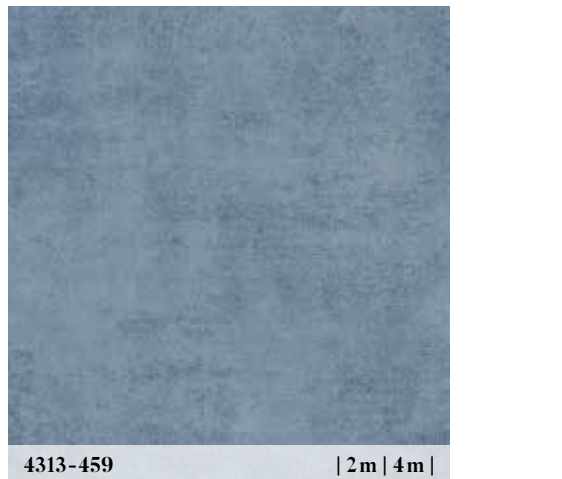

4313-459

| 2m | 4m |