

**Product Information**

Norm	EN ISO 26986			* check individual ref. for available widths
Intensity of use	ISO 10874 (EN 685)		21 Domestic moderate / light	class
Total Thickness	EN ISO 24346 (EN 428)		2,30	mm
Wearlayer	EN ISO 24340 (EN 429)		0,15	mm
Abrasion group	EN 660-2		T	class
Total weight	EN ISO 23997 (EN 430)		1365	g/m <sup>2</sup>
Standard width	EN ISO 24341 (EN 426)		2 - 3 - 4 *	m
Standard length	EN ISO 24341 (EN 426)		+/- 30	m

**Technical Information**

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40	%
Curling	EN ISO 23999		≤ 8	mm
Light stability	EN ISO 105 B02		≥ 6 - 7	degree
Residual indentation	EN ISO 24343-1 (EN 433)		≤ 0,35	mm
Impact sound improvement	EN ISO 717/2		Δ Lw 17	dB
Dynamic coefficient of friction	EN 13893		> 0,6	
Slip resistance (ramp test with oil)	DIN 51130		R10	scale
Reaction to fire Report number ---- VNLf 031380.4	EN 13501-1		Bfl-s1	class
Underfloor heating	EN 12667		Suitable	
Thermal resistance	ISO 8302		0,015	m <sup>2</sup> K/w
Thermal conductivity	EN 12524		0,15	W/m.K
Chemical resistance	ISO 26987 (EN 423)		resistant	
Static Electrical Propensity	EN 1815		< 2kV	On concrete

**Environment**

100% Recyclable.

- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers

**E1** APPROVED FOR EMISSIONS  
E1 means that the level of formaldehyde is inferior to 0.1ppm (= 0.12 mg/m<sup>3</sup> of air)

This is illustrative by the choice of raw materials, of partners, of transport and of fabrication processes. Our selection of core materials is based on a combination of our clients' requirements for a quality product as well as requirements for a minimal impact on the environment. We are the leaders in terms of the implementation of clean renewable energy sources and we actively work towards the constant improvement of energy saving.

**ÉMISSIONS DANS L'AIR INTÉRIEUR**  
**A+**  
Our products are classified as A+ for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)


100% phthalate free  
\*for all products produced from May 2017 onwards

**floor score**  
A+ A B C  
Ausschuss zur gesundheitlichen Bewertung von Bauprodukten

ISO 9001 - ISO 14001  
**BUREAU VERITAS**  
Certification

**Product Build**

1. PU lacquer
2. Wear layer
3. Design layer
4. Compact layer
5. Impregnation layer
6. Glass fibre interlayer
7. Backing

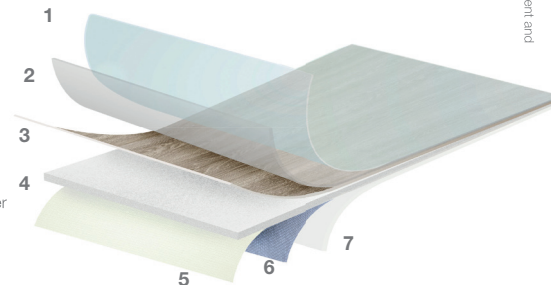

EN 14041  
**CE**  
**05**  
DOP: 450-CC0019-1  
EU Lic Flooring in, Renewed  
402 21 0110 (Belgium) 000 000 000  
NB: D34  
Suitable floor covering for use  
within buildings

**Features**

